



Head Office:

Mumbai: 1206, Centrum IT Park, Plot No C-3, S.G. Barve Road,
Opp Railadevi TMC Office, Next to Satkar Grande Hotel,
Wagle Estate, Near Mulund Checknaka, Thane West, 400604

Contact: +91 73049 96231



Branch Office:

Pune: 315, A Wing, Laxmi Horizon, Punawale, Pune - 411033

Contact: +91 72186 72837



04. INTRODUCTION


06. D-45SG 

08. D-45S 


10. D-45SEG 

12. D-45BRK 

14. D-75T 


16. D-75T+ 

18. D-105WG 

20. D-105WG+ 

21. D-25F 

22. D-SW75 

22. D-DW100 

24. DOOR SYSTEM 

26. CUSTOM

28. GALLERY



Vertical Surfaces divide the office floor in closed and open areas, provide acoustic and visual barriers, promote transparency and privacy simultaneously.

Specialising in modern office partitions designs, we can provide you a range of partition systems, and help you create the perfect office layout design.

Dela is the leading commercial Partitioning System Provider. With qualified and experienced team of professionals we offer our Innovative, spacious partitioning systems designed to meet the particular needs of offices, banks, healthcare and retail environments.

Our systems are designed such as to provide infinite possibilities of design combination to match the concepts and designs of the architects and also the customer's requisites.

All our products are finished using a sandblasted process, powder coated for an entire array of RAL Shades and our latest range includes stunning Stainless Steel, bronze, rose-gold and endless possibilities of finishes.



D-45SG

SINGLE GLAZED SLIMLINE 45 WITH GROOVE

Dela System D-45SG i.e. Slimline Single glazed modular system consist of Aluminium section of 25*45*2.5 mm thick. All sections duly anodised up to 20-25 microns with 6063-T6 grade and required accessories ie glass to glass aluminium I sections, T section & 90 degree sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 45 mm wide with 10mm/12mm toughen glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 32 to 35 Db. With 6 mm Groove inbuilt in system to accommodate the carpet & the uneven surfaces

Dela D-45SG is a single-glazed system with two double-sided non load-bearing aluminium frames. Depending on the requirements the frames can be finished with an anodised or powder-coated surface. Whether vertically or horizontally installed, the glass panels accentuate the system's clean lines. A special feature of the system is its combination of aesthetics with outstanding high technical performance. With 6mm shadow line to accommodate carpet wooden flooring and also gives an elegant groove line to enhance the aesthetic appearance. The structure can be used in full, partial or even fanlight glazing applications.

T6 Grade Virgin Aluminium

Section Dimensions

Width: 45 mm

Height: 25 mm

Thickness: 2.5 mm

Gasket: Silicon Based

Glass Connection System: Aluminium/ Clear G2G Seal

Bonding: Glass mounting clear adhesive tape





D45S

SINGLE GLAZED SLIMLINE 45

Dela System D-45S i.e. Slimline Single glazed modular system consist of Aluminium section of 25*45*2.5 mm thick. All sections duly anodised up to 20-25 microns with 6063-T6 grade and required accessories ie glass to glass aluminium I sections, T section & 90 degree sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 45 mm wide with 10mm toughen glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 32 to 35

Dela D-45S is a single-glazed system with two double-sided non load-bearing aluminium frames. Depending on the requirements the frames can be finished with an anodized or powder-coated surface Whether vertically or horizontally installed, the glass panels accentuate the system's clean lines. A special feature of the system is its combination of aesthetics with outstanding high technical performance. The structure can be used in full, partial or even fanlight glazing applications.

T6 Grade Virgin Aluminium

Section Dimensions

Width: 45 mm

Height: 25 mm

Thickness: 2.5 mm

Gasket: Silicon Based

Glass Connection System: Aluminium/ Clear G2G Seal

Bonding: Glass mounting clear adhesive tape





D-45SEG

SEGMENTED SINGLE GLAZED

Dela System D-45SEG i.e. Segmented Slimline Single glazed modular system consist of Aluminium section of 25*45*2.5 mm thick segmented partition with groove line at periphery sections. All sections duly anodized up to 20–25 microns with 6063-T6 grade and required accessories ie glass to glass aluminium Vertical section of 45X 20 mm sections, Horizontal snap fit section of 45X25mm sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 45 mm wide with 10mm toughen glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 32 to 35

Dela Segmented partition systems using the 10mm-thick patterned glass and carefully-crafted door frames to help divide spaces for conference rooms/cabins and entrances. This high performing system is able to meet the most demanding technical and aesthetic requirements.

T6 Grade Virgin Aluminium
Section Dimensions
Width: 45 mm
Height: 25 mm
Thickness: 2.5 mm
Gasket: Silicon Based
Glass Connection System: Aluminium/ Clear G2G Seal
Bonding: Glass mounting clear adhesive tape

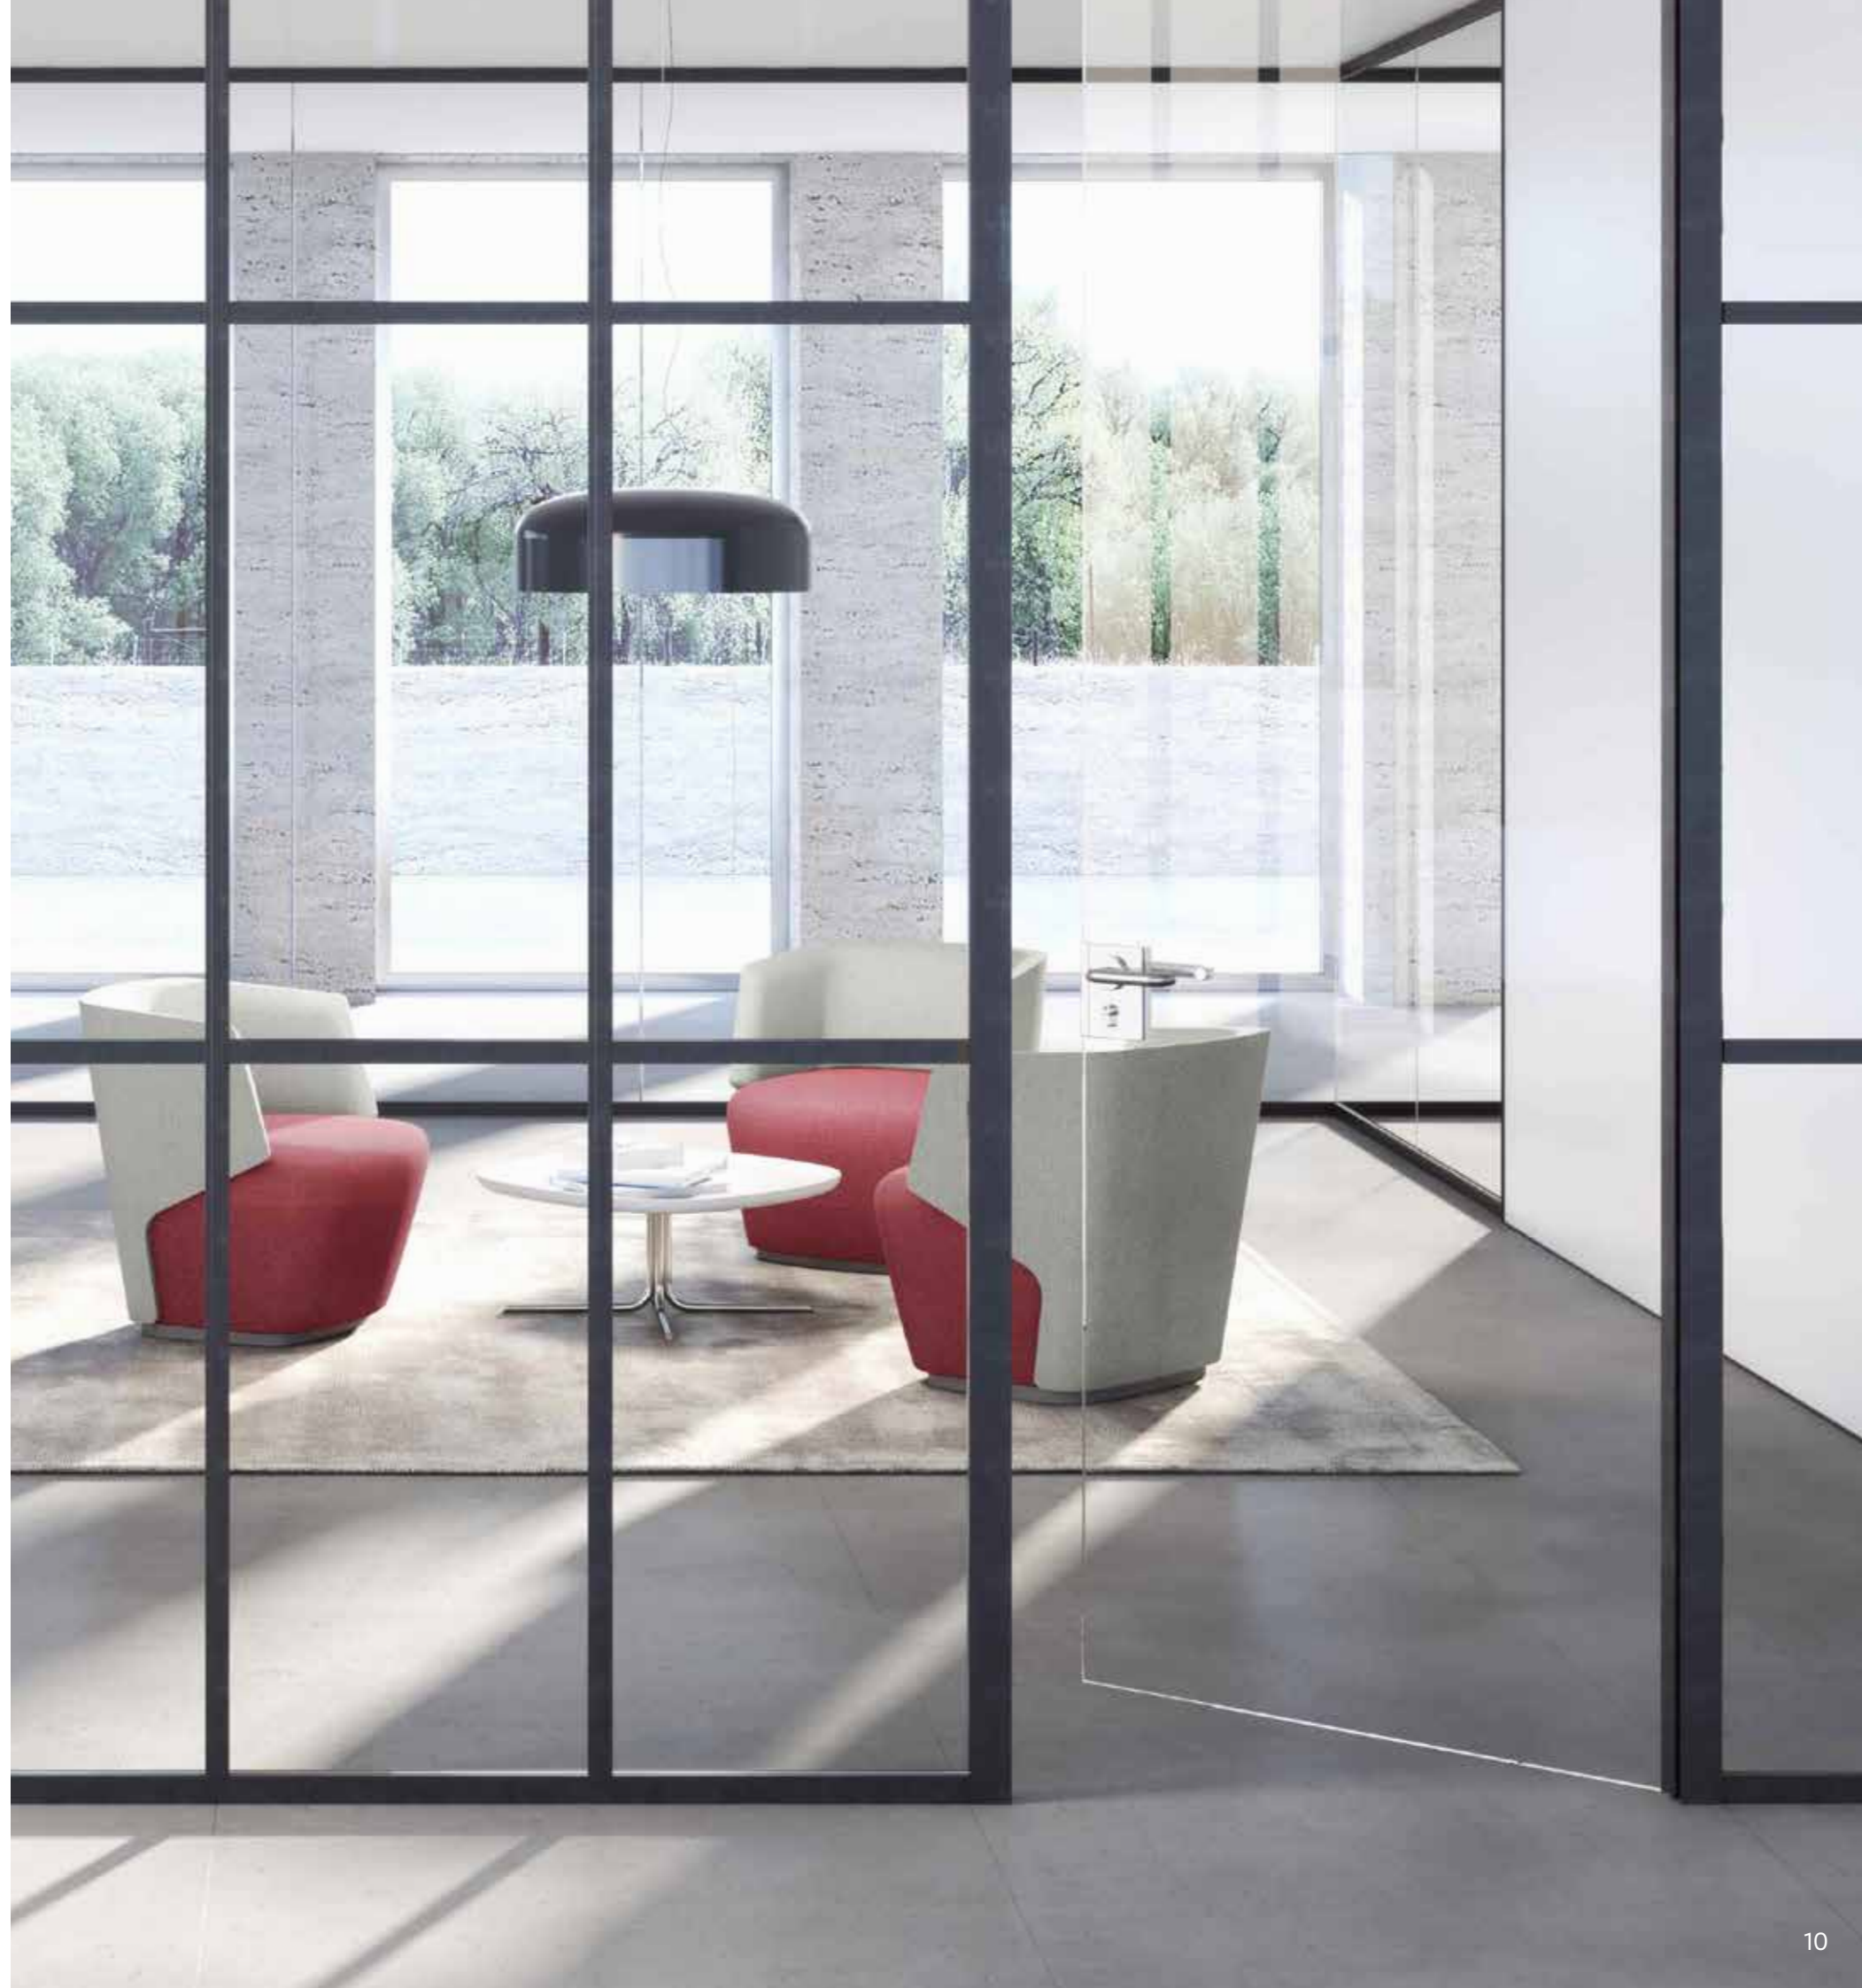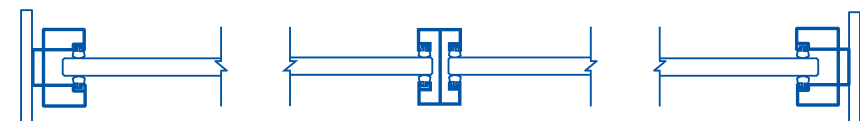



D-45BRK BROOKLYN SINGLE GLAZED

Brooklyn system is a key element in creating an office space with a subtle art deco or vintage feel. The contours and contrasting of the individual partitions have been measured to the finest detail, resulting in an office system that gives spaces a modern edge within a stylish office environment.

Dela System D-45BRK i.e. Brooklyn Slim line Single glazed modular system consist of Aluminium section of 25*45*2.5 mm thick Brooklyn partition with groove line at periphery sections. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium Vertical section of 17.5X 20 mm sections, Horizontal stick-on section of 17.5X25mm sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 45 mm wide with 10mm toughen glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 32 to 35

T6 Grade Virgin Aluminium
Section Dimensions
Width: 45 mm
Height: 25 mm
Thickness: 2 mm
Gasket: Silicon Based
Glass Connection System: Aluminium/ Clear G2G Seal
Bonding: Glass mounting clear adhesive tape





D-75T SINGLE GLAZED TRIMLINE 75

Dela System D-75W i.e. Trimline Single glazed modular system consist of Aluminium section of 25*75*1.5 mm thick. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories ie glass to glass aluminium I sections, T section & 90 degree sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 75 mm wide with 10mm toughened glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. Sound Reduction from 32 to 35 db.

The glass partition system D-75W is constructed with aluminium frames 75 x 25mm, finished with powder-coating or anodizing in desired colour. The system offers a variety of acoustic performances. A particular feature of the system is its flush appearance. You have the option of vertical or horizontal installation of the panel, for full, partial or fanlight glazing.

T6 Grade Virgin Aluminium
Section Dimensions
Width: 75 mm
Height: 25 mm
Thickness: 1.5 mm
Gasket: Silicon Based
Glass Connection System: Aluminium/ Clear G2G Seal
Bonding: Glass mounting clear adhesive tape



D-75T+


DOUBLE GLAZED TRIMLINE 75



Dela system D-75T+ i.e. Trimline Double glazed modular system consist of Aluminium section of 25*75*1.5 mm thick. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories i.e. glass to glass aluminium I sections, T section & 90 degree sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 60 mm wide with 10mm/12mm toughen glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 45 to 49 Db.

The glass partition Dela D-75T+, is the new benchmark disclosing maximum space transparency combined with unlimited layout flexibility. The two glass panes for the double glazed system are fixed in 75 x 25 mm profiles. Therefore, maximum glass visibility provides an open modern appearance. Good sound insulation & the alternative opportunity for the integration of blinds allow the implementation of an individual, delightful and undisturbed working ambience. Either in offices, conference rooms or training facilities - Dela D-75T+ opens all possibilities to optimize design for the internal space development.

T6 Grade Virgin Aluminium
Section Dimensions
Width: 75 mm
Height: 25 mm
Thickness: 1.5 mm
Gasket: Silicon Based
Glass Connection System: Aluminium/ Clear G2G Seal
Bonding: Glass mounting clear adhesive tape

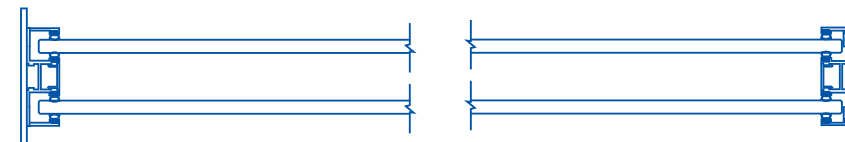



D-105WG


SINGLE GLAZED WIDELINE 105 WITH GROOVE

Dela System D-105WLG i.e. wideline Single glazed modular system consist of Aluminium section of 25*105*1.5 mm thick. All sections duly anodised up to 20-25 microns with 6063-T6 grade and required accessories ie glass to glass aluminium I sections, T section & 90 degree sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 105 mm wide with 10mm toughened glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. Sound Reduction from 32 to 35 db. With 6 mm Groove inbuilt in system to accommodate the carpet & the uneven surfaces.

Dela D-105WG, wideline design makes the system look elegant classy and sophisticated, provide the designers options of profiles to add aesthetic appeal. Also available with 6mm groove line to provide a uniform groove running throughout partition.

Aluminium profiles with powder coated or anodised finishes are serving as horizontal and vertical connections to the building structure.

T6 Grade Virgin Aluminium
 Section Dimensions
 Width: 105 mm
 Height: 25 mm
 Thickness: 1.5 mm
 Gasket: Silicon Based
 Glass Connection System: Aluminium/Clear G2G Seal
 Bonding: Glass mounting clear adhesive tape

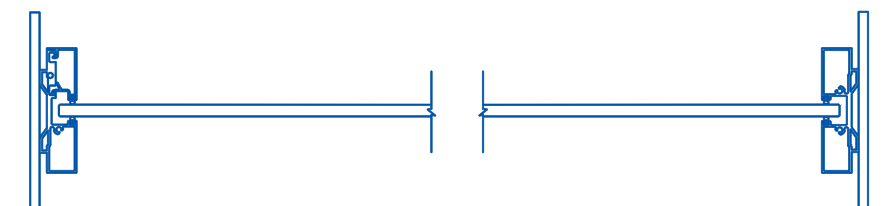

D-105WG+

DOUBLE GLAZED WIDE LINE 105 WITH GROOVE

Dela system-105WG+ i.e. Wideline Double glazed modular system consist of Aluminium section of 25*105*1.5 mm thick. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories ie glass to glass aluminium I sections, T section & 90 degree sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 105 mm wide with 10mm toughen glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 45 to 49 Db. With 6 mm aluminium Groove inbuilt in system to accommodate the carpet & the uneven surfaces

The glass partition Dela D-105WG+, is the new benchmark disclosing maximum space transparency combined with unlimited layout flexibility.

The two glass panes for the double glazed system are fixed in 105 x 25 mm profiles. Therefore, maximum glass visibility provides an open modern appearance. Good sound insulation and the alternative opportunity for the integration of blinds allow the implementation of an individual, delightful and undisturbed working ambience.

Either in offices, conference rooms or training facilities - Dela D-105WG+ opens all possibilities to optimize design for the internal space development.

T6 Grade Virgin Aluminium

Section Dimensions

Width: 105 mm


Height: 25 mm

Thickness: 1.5 mm

Gasket: Silicon Based

Glass Connection System: Aluminium/ Clear G2G Seal


Bonding: Glass mounting clear adhesive tape

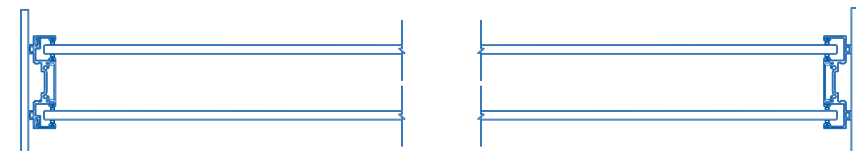



D-SW75 SOLID WALL 75

Pre-engineered and 100% factory fabricated, the system provides a unitized and modular feature which allows for quick install and easy relocation. With snap on panels, electrical kits, and an array of finishes. The design possibilities are endless



D-25F SINGLE GLAZED FINELINE 25

Dela System D-25F i.e. Fineline Single glazed modular system consist of Aluminium section of 25*25*2 mm thick. All sections duly anodized up to 20-25 microns with 6063-T6 grade and required accessories i.e glass to glass aluminium I sections, T section & 90 degree sections & Glass packing to adjust the floor level. Ceiling profile, Floor profile and wall profile are 25 mm visible face and 25 mm wide with 10mm toughen glass & insertion of Thermoplastic gasket to adhere the glass firm & airtight. The sound reduction Value is from 32 to 35 Db

When the architecture of a building promotes lightness and space and the function of the room requires a minimalist partition solution, glazed system Dela D-25F provides the answer. With the glazing held in a perimeter frame profiles 25 x25mm, with no need for gridwork or vertical load-bearing elements, a transparent and open room is created. Aluminium profiles with powder coated or anodised finishes are serving as horizontal and vertical connections to the building structure.


T6 Grade Virgin Aluminium
Section Dimensions
Width: 25 mm
Height: 25 mm
Thickness: 2 mm
Gasket: Silicon Based

Glass Connection System: Aluminium/ Clear G2G Seal
Bonding: Glass mounting clear adhesive tape




D-SW100 SOLID WALL 100

Pre-engineered and 100% factory fabricated, the system provides a unitized and modular feature which allows for quick install and easy relocation. With snap on panels, electrical kits, and an array of finishes. The design possibilities are endless

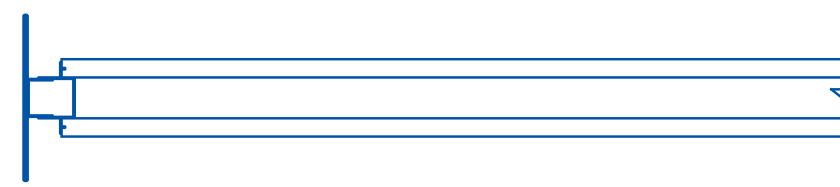

DOOR SYSTEMS

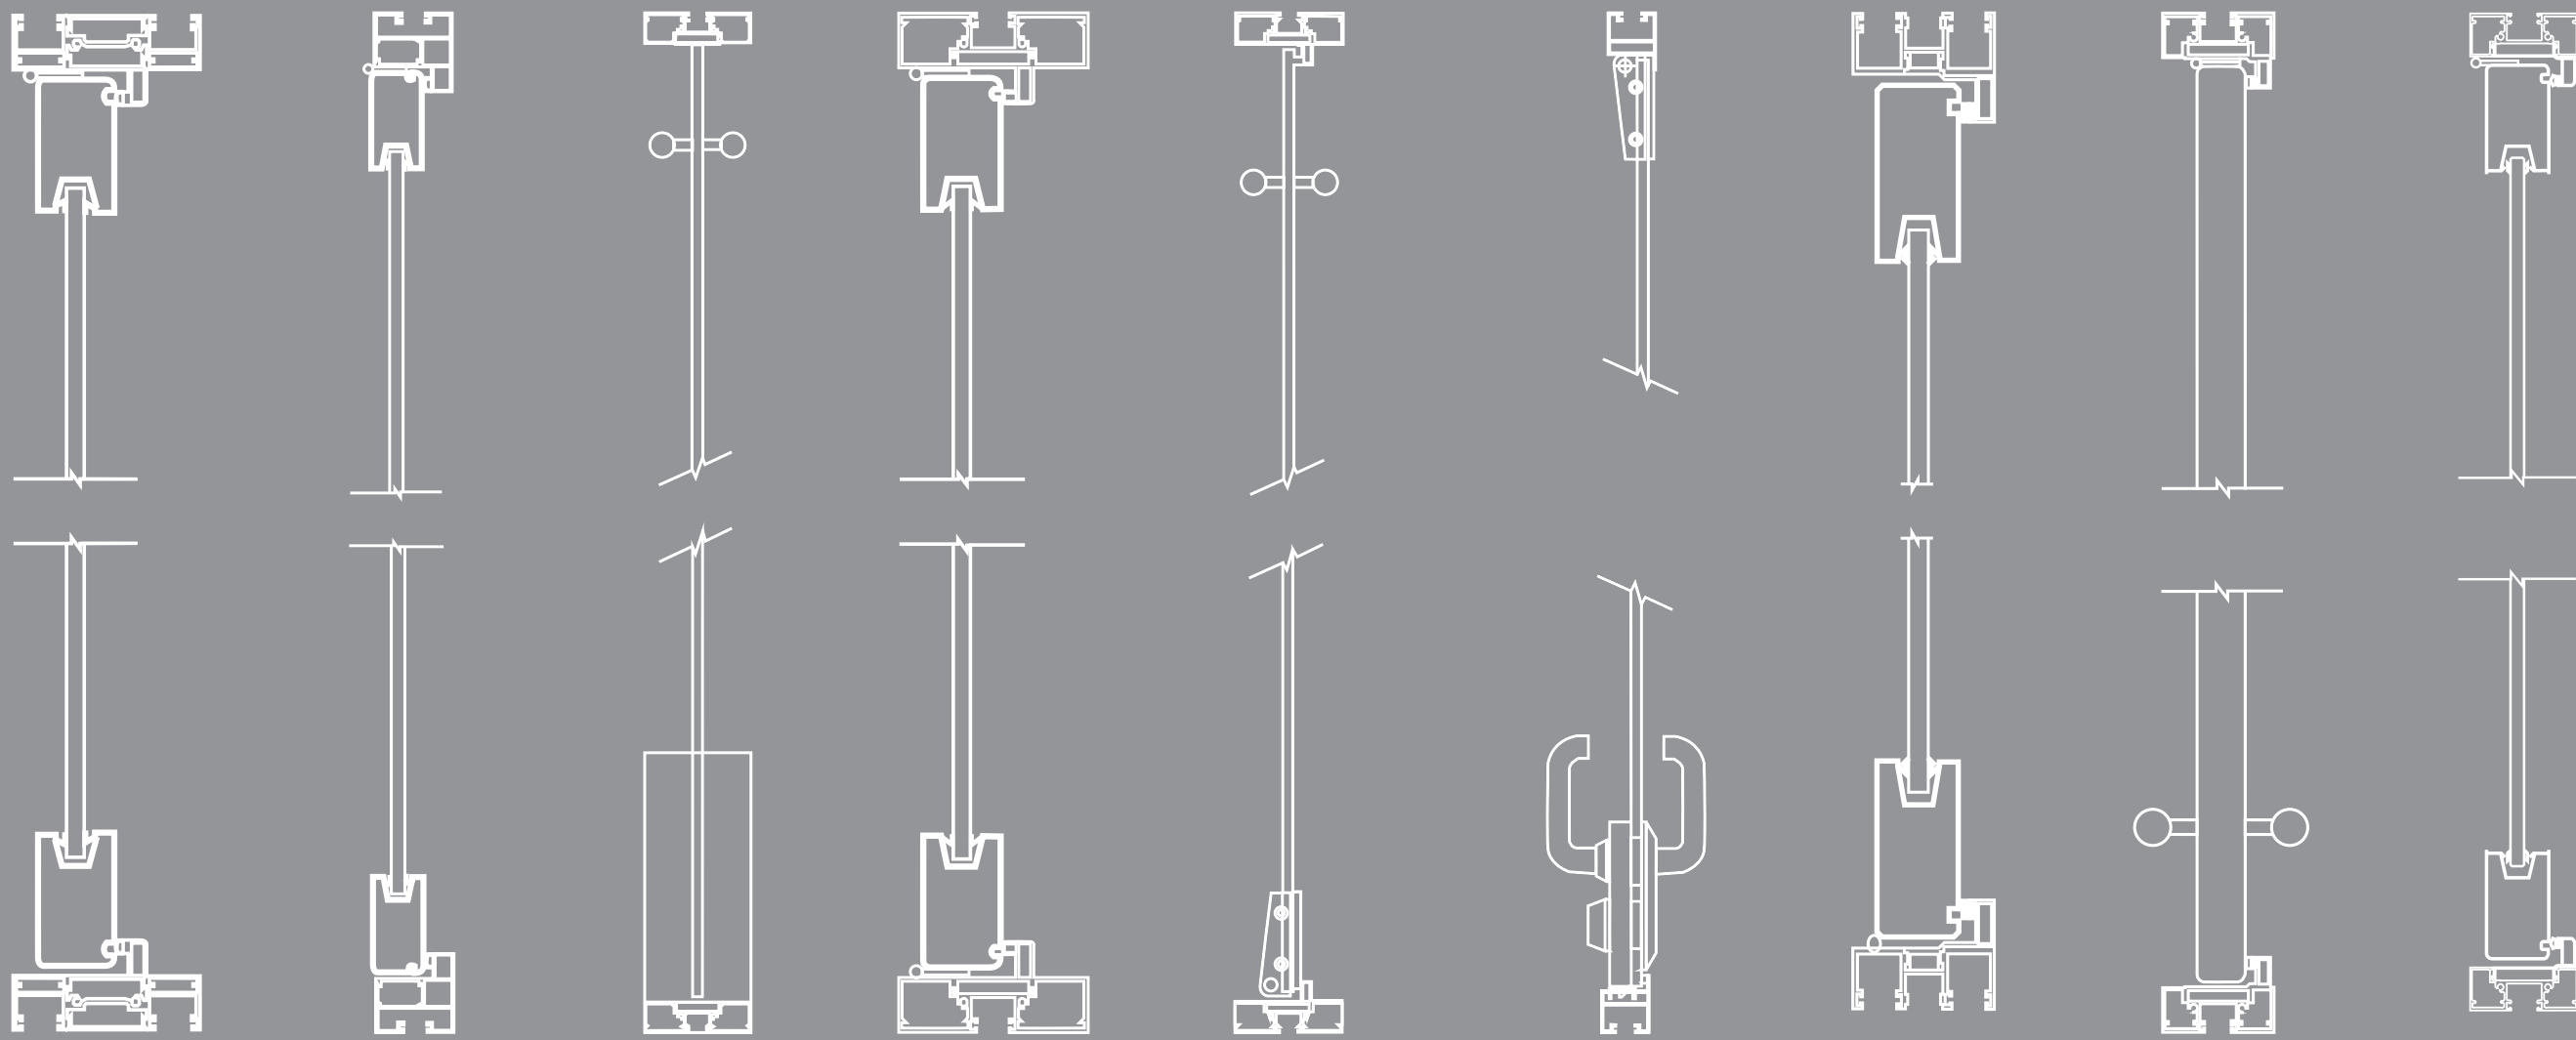

D-105+ STILE DOOR

D-45 SLIM STILE
DOOR

D-105/75 FRAMELESS
GLASS DOOR

D-105 STILE DOOR

D-105/75 FRAMELESS
GLASS DOOR

D-45 FRAMELESS
GLASS DOOR

D-75+ STILE DOOR

D-75 SOLID DOOR

D-75 STILE DOOR



CUSTOM





GALLERY



GALLERY

